



- 1,600 ANSI Lumens
- 5.1 lbs.
- Vertical Keystone Correction
- RGB / Component / Composite / S-video Inputs
- Native XGA Resolution
- Contrast Ratio 500:1
- Auto Configuration (H-Size, Position)
- Approx. 3,000 Hour Lamp Life Whisper Mode
- Reverse Image Function for Ceiling Mount
- Gamma Correction
- Freeze Function
- Magnify (4x)
- 33dB (Whisper Mode)
- 2-3 Pull Down
- Throw Ratio 1.5-1.8:1
- Optical Zoom / Digital Zoom x 1.2

SPECIFICATIONS

Model Number		CP-RX61	
Liquid crystal panel structure		0.6" polysilicon active-matrix TFT x 3 with micro lens	
Resolution	Video	540 TV Lines	
	RGB	1024 Dots x 768 Lines	
Colors		16.7 million colors	
Aspect ratio		Native 4:3; or 16:9 Compatible	
Lens		F1.6-1.9, Manual Zoom x 1.2, manual focus	
Throw distance		4-36ft (60" at 5.9 ft)	
Lamp		165W UHB	
Brightness		1,600 ANSI Lumens	
Contrast Ratio		500:1	
Expected lamp life		Approx. 2,000 hours (Approx. 3,000 hours in Whisper Mode)	
Speakers		1 x 1W	
Power supply		AC100-120V/AC220-240V, 50/60 Hz, Auto Switching	
Power consumption		240W	
Approvals		UL60950/C-UL, FCC Class B, CE, EN60950	
Operating temperature		0 ~ 35°C (32° ~ 95°F)	
Inputs	RGB	VGA, SVGA, XGA, SXGA, UXGA MAC 16", 480i, 576i, 480p, 720p, 1080i	
	Composite Video	NTSC, NTSC4.43, PAL (-BGDH), SECAM, PAL-M, PAL-N	
	Plug & Play	DDC1/2B	
Acoustic noise level		38dB (33dB in Whisper Mode)	
Vertical keystone correction		Digital Keystone +/- 15°	
Input/Output terminals	Data input	RGB 15-pin D-sub connector x 2	
	Video input	S-video	Mini DIN 4-pin input connector x 1
		Composite video	RCA jack x 1
	Audio input	Stereo mini jack x1	
	Audio output	Stereo mini jack x1 (source selected)	
Control terminals		9-pin D-sub connector x 1 RS-232C (Serial)	
Chassis	Dimensions		11.22" x 2.87" x 7.94" (W x H x D)
	Weight		5.1 lbs.
	Supplied accessories		Remote control, batteries (AA), power cord, RGB cable, Filter Cover for Ceiling Mount Use, Safety Instruction Guide, User Manual (CD)
Replacement parts	Lamp		CPRS55LAMP
	Remote control		HL02212
	Filter		NJ20922




Screen Size 4:3		Throw distance	
Diagonal*	Width*	Min*	Max*
40	32	47	57
60	48	71	86
80	64	95	115
100	80	119	143
120	96	143	172
150	120	179	216
200	160	239	288

Throw ratio: 1.5-1.8:1 (distance:width)

* Measured in inches

CP-RX61 Dimensions

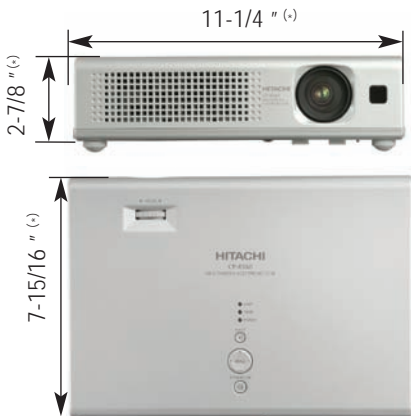

(*) Excluding Lens and Leg